

ES1523RTP

This fully electric rough terrain scissor lift ensures greater jobsite versatility. It is equipped as standard with 4WD and rough terrain solid non-marking tyres. The stabilisers are automatic and ensure stability when working at height. The platform allows for side-shift at its maximum height, ensuring greater flexibility.



STANDARD EQUIPMENTS:

- Automatic stabilizers to work at height
- Standard oscillating axle
- Crushing protection
- Self-locking door on the platform
- Speed limit at maximum height
- Platform load sense system
- Automatic braking system
- Non-marking tyres
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Horn
- Emergency stop button
- Emergency lowering
- Anchoring eyebolts
- Onboard diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Power to platform
- Explosion-proof tubing system
- Motion Alarm
- Integrated holes for fork transport
- Charging indicator
- Tie-down and lifting points
- Dual slide-out platform extension deck
- 2 Wheels Steering
- Four-wheel drive
- Self-weight lowering system
- Emergency pump
- Manual emergency brake release

MAIN APPLICATIONS



Maintenance



Plant Service



Construction



Distribution/
Logistics




Large events

ES1523RTP

Load capacity	680 kg
Load capacity on extended platform	227 kg
Max no. occupants	7
A Working height	15 m
B Platform floor height	13 m
C Overall length (with outriggers)	4.88 m
D Overall width	2.29 m
E Overall height (rails up)	2.98 m
F Transport height (rails down)	2.28 m
Platform size (length/width)	3,98x1.83 m
H G Platform extension size	1.43 m / 1.16 m
Ground clearance	30 cm
I Wheelbase	2.86 m
Turning radius (inside/outside)	2.35 m / 5.2 m
Engine	-
Drive motor	4x32 V / 3.3 kW
Lifting motor	2x48 V / 8.0 kW
Travel speed (stowed)	6.0 km/h
Travel speed (raised)	1.0 km/h
Gradeability	40%
Maximum working slope	2°/3°
Batteries	2x48 V/450 Ah
Integrated charger	48 V / 60 A
Hydraulic tank	130 l
Diesel tank	-
Tyres	33x12-20
Weight (with outriggers)	8,200 kg

STANDARDS COMPLIANCE:
EN 280, ANSI/SAIA A92.20

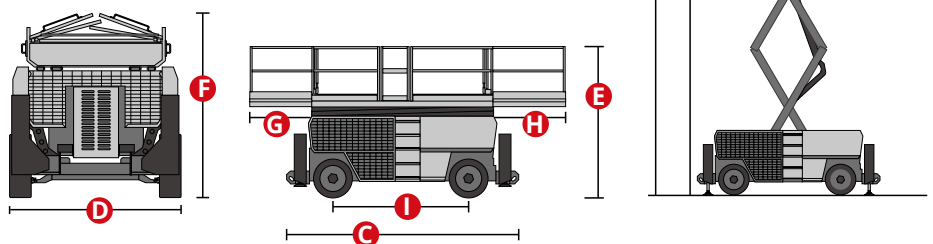

Automatic stabilizers



On-board diagnostic system