

**IN
OUT****4WD****4WS**

HAB28RT

Articulated boom lift

STANDARD EQUIPMENT

- Oscillating front axle
- Stability on all kinds of terrain
- Two travel speeds
- Four-wheel steering
- Four-wheel drive
- 360° rotation (continuous)
- Special construction equipment-grade integral driveshaft
- Modular design making pieces compatible throughout the range
- Proportional controls
- Thumb rocker steering
- Flashing light
- Non-marking tyres
- Horn
- Hour counter
- Harsh environment kits
- 12V DC Auxiliary power

BATTERY

- Lithium battery - Maintenance-free
- Battery capacity: 80V/420Ah
- Charger: -
- Single- and three-phase, 380V and 220V
- Recharge time, 0 - 100% (hours)* 5,5
- Range Extender engine: Kubota Z482/9.8kW

BASKET


- Self-levelling
- Rotation +/-90°
- Schuko power socket 16A/250V

SAFETY

- Drive enable system
- Platform load moment indicator
- On-board diagnostics system
- Emergency lowering system
- Tilt indicator with alarm
- Crushing protection



**CONSTRUCTION****LOGISTICS**

LOAD CHART

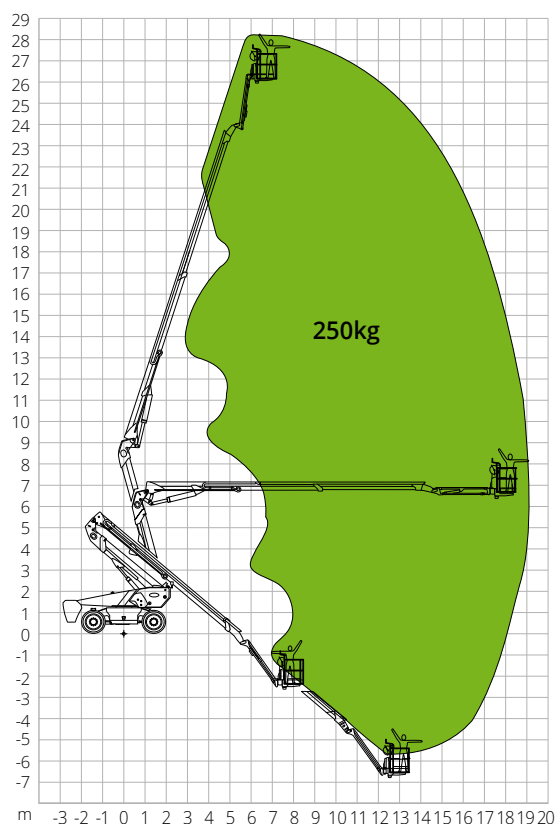

DIMENSIONS

Platform length	-
Platform length (transport)	9.22 m
Platform width (tyres)	-
Platform width (transport)	2.50 m
Platform height	-
Platform height (transport)	3.00 m
Wheelbase	B 2.80 m
Tailswing	1.61 m
Ground clearance	A 0.41 m

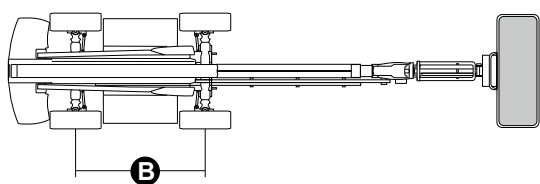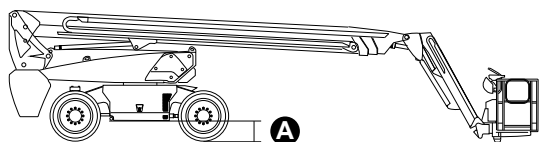

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.

HAB28RT

Technical data

Max. working height	28.15 m
Max. basket height	26.15 m
Articulation point	9.14 m
Max. reach	19.04 m
Turning radius (outside)	3.22 m
Turning radius (inside)	1.87 m
Basket width	0.91 m
Basket length	2.44 m
Basket rotation	180°
Jib type	Standard
Jib length	2.31 m
Jib Vertical Rotation	135°
Below-ground height	9.14 m
Auxiliary power	12V DC

Performance

Platform max. load capacity	250 kg
Max. occupants	2
Max. gradeability (stowed)	30%
Max. working slope	X-5°/Y-5°
Max. wind speed	12.5 m/s
Travel speed (closed config.)	6.0 km/h
Travel speed (working config.)	1.1 km/h
Turret rotation (continuous)	360°

Engine

Power	54V AC/18kW
Range Extender engine	Kubota Z482/9.8kW
Diesel tank capacity	110 l
Hydraulic tank capacity	165 l

Transmission	Hydrostatic
--------------	-------------

Total weight	18,400 kg
---------------------	-----------

Specific characteristics

Tyres	385/45-28
Battery type	Lithium battery - Maintenance-free
Battery capacity	80V/420Ah
Charger	-
Charger type	Single- and three-phase, 380V & 220V
Recharge time, 0 - 100% (hours)*	5.5
Lifting motors	-

*Nominal. The actual value depends on weather and usage factors

STANDARDS COMPLIANCE: EN280-1-1, ANSI/SAIA A92.20