

**IN
OUT**
4WD
4WS

EAB22RT

Articulated boom lift



STANDARD EQUIPMENT

- Oscillating front axle
- Two travel speeds
- Four-wheel steering
- Four-wheel drive
- 360° rotation (continuous)
- Special construction equipment-grade integral driveshaft
- Modular design making pieces compatible throughout the range
- Proportional controls
- Thumb rocker steering
- Flashing light
- Non-marking tyres
- Horn
- Hour counter
- Harsh environment kits
- 12V DC Auxiliary power

BATTERY

- TIANNENG - Lead-acid battery
- Battery capacity: 48V/450Ah
- Charger: 48VDC/60A
- Single-phase 220V
- Recharge time, 0 - 100% (hours)* 5
- Platform power socket

BASKET


- Self-levelling
- Rotation +/-90°
- Schuko power socket 16A/250V

SAFETY

- Drive enable system
- Platform load moment indicator
- On-board diagnostics system
- Emergency lowering system
- Tilt indicator with alarm
- Crushing protection


**CONSTRUCTION****LOGISTICS**

LOAD CHART

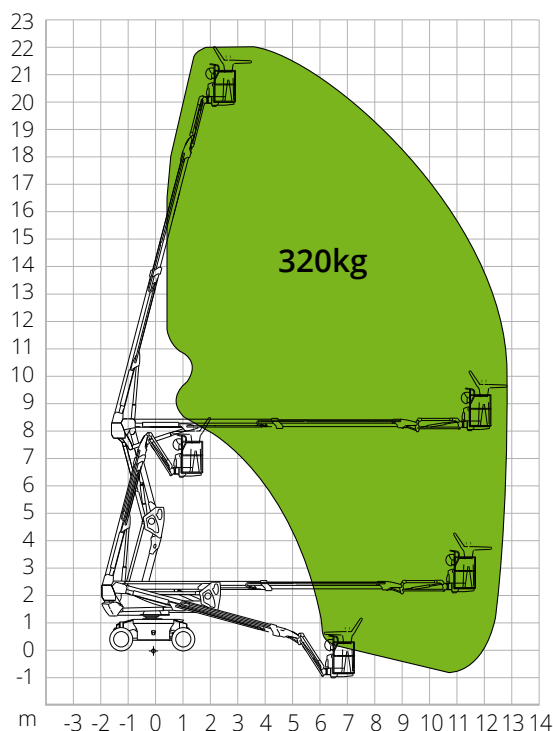

DIMENSIONS

Platform length	-
Platform length (transport)	7.36 m
Platform width (tyres)	-
Platform width (transport)	2.44 m
Platform height	-
Platform height (transport)	2.59 m
Wheelbase	B 2.40 m
Tailswing	0.70 m
Ground clearance	A 0.31 m

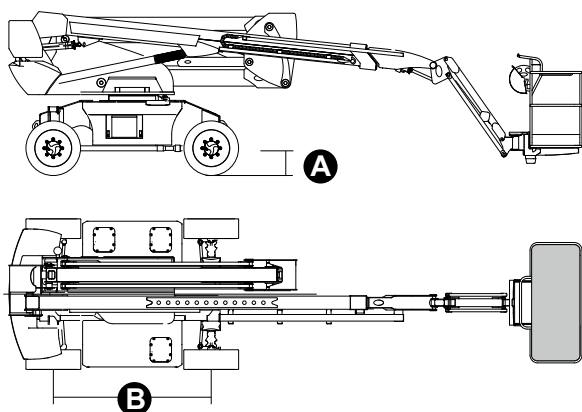

EAB22RT

Technical data

Max. working height	22.04 m
Max. basket height	20.04 m
Articulation point	8.18 m
Max. reach	13.17 m
Turning radius (outside)	4.73 m
Turning radius (inside)	3.00 m
Basket width	0.79 m
Basket length	1.83 m
Basket rotation	180°
Jib type	Standard
Jib length	1.50 m
Jib Vertical Rotation	132°
Below-ground height	1.74 m
Auxiliary power	12V DC

Performance

Platform max. load capacity	320 kg
Max. occupants	2
Max. gradeability (stowed)	35%
Max. working slope	X-5°/Y-5°
Max. wind speed	12.5 m/s
Travel speed (closed config.)	6.0 km/h
Travel speed (working config.)	1.1 km/h
Turret rotation (continuous)	360 °

Engine

Power	34 AC/9kW
Hydraulic tank capacity	145 l
Transmission	Hydrostatic

Total weight

10,150 kg

Specific characteristics

Tyres	315/55-D20
Battery type	TIANNENG - Lead-acid battery
Battery capacity	48V/450Ah
Charger	48VDC/60A
Charger type	Single-phase 220V
Recharge time, 0 - 100% (hours)*	5
Lifting motors	34V AC/13 kW

*Nominal. The actual value depends on weather and usage factors

STANDARDS COMPLIANCE: EN280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice.
All images are purely guideline and might not give an exact representation of the product.