MAGNI
TELESCOPIC HANDLERS

IN
OUT

ES2223RTP

Rough terrain scissor lift

STANDARD EQUIPMENT

- Automatic stabilizers to work at height
- Crushing protection
- Self-locking door on platform
- Speed limit at full height
- Platform load sense system
- Automatic braking system
- Non-marking tyres
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Horn
- Emergency stop button
- Emergency lowering system
- Anchoring eyebolts
- On-board diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Platform power socket
- Motion alarm
- Charging protection system
- Unidirectional platform extension
- Four-wheel drive
- Four-wheel steering
- Self-weight lowering system
- Emergency pump
- Drivable at full height



LOGISTICS | CONSTRUCTION

ES2223RTP		
Load capacity		750 kg
Load capacity on extended platform		750 kg
Max. occupants (inside/outside)		4/4
Max. working height	A	22.00 m
Platform floor level height (inside)	B	20.00 m
Overall length	C	4.95 m
Overall width	D	2.46 m
Overall height (rails up)	E	3.86 m
Transport height (rails down)	F	3.00 m
Platform dimensions (length/width)		4.95 m/2.25 m
Platform extension	G	2.70 m
Ground clearance		0.40 m
Wheelbase	H	3.30 m
Turning radius (inside)		1.25 m
Turning radius (outside)		3.40 m
Engine		-
Range Extender engine		-
Driving motors		4x32VAC/3.3kW
Lifting motors		2x48VDC/10.0kW
Travel speed (stowed)		5.0 km/h
Travel speed (raised)		0.4 km/h
Batteries		48V/630Ah
Diesel tank		-
Hydraulic tank		150 l
Integrated battery charger		-
Gradeability		30%
maximum working slope		2°/3°
Tyres		36x14-20
Weight (CE)		13,400 kg



Automatic stabilizers



Airride rt tyres

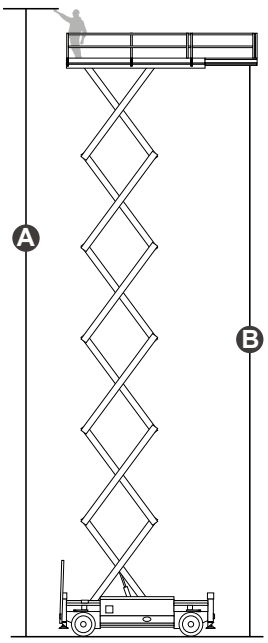





STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.

magnith.com