

ROUGH TERRAIN FORKLIFTS

FL
2,5A



CONSTRUCTION



LOGISTIC

Model Identification	Model name	FL2,5A
	Load Capacity - with STD WVM3,0	2,500 kg
	Load center	500 mm
	Power source	Diesel
	Distance from the center of the front axle to the fork deck	585 mm
Weight	Weight	4,850 kg
	Weight on front axle (laden) / rear axle (laden)	6,190/1,160 kg
	Weight on front axle (unladen) / rear axle (unladen)	2,130/2,720 kg
Wheels	Tyres type	Pneumatic
	Tyres brand	Exmille
	Dimensions of front wheels	12-16.5-14PR
	Dimensions of rear wheels	10,0/75-15,3
	Number of wheels drive	4WD - 2X /2X
Stage III engine	Model name ID	FL2,5 RT-Y/A
	Engine brand and model	YANMAR 4TNE98
	Engine cylinders/displacement	4/3319
	Rated speed	2,300 rpm
	Engine emission stage	Stage IIIA
	Kw/(hp)	42.1 kW (56hp)
Performances	Travel speed (laden/unladen)	24/26 km/h
	Lifting speed (laden/unladen)	0.62/0.64 m/s
	Lowering speed (laden/unladen)	0.5/0.44 m/s
	Drawbar pull (laden)	4,000 daN
	Gradeability (laden)	58 %
	Transmission model	4F35S
	Transmission type	Suspended hydraulic
	Axles type	Wet braking
	Differential with automatic locking function	Electric differential lock by manual
	Service brake	Hydraulic
	Park brake	Mechanical
	Battery	12 V
	Working hydraulic pressure for attachments	185 bar
	Oil flow rate for attachments	80 l/min
Others	Noise level Lwa dB(A) guaranteed	WIP

FULL COSTUMIZATION POTENTIAL

You can get max comfort even in extreme environments! Choose from a full list of options for your forklift from the sound-absorbing panel to the closed cab.


Get the best efficiency and versatility for your workday.



FULLY CLOSED CAB AVAILABLE AS AN OPTION

Customize your machine with a fully enclosed cabin, full-height doors, and an optional air conditioning and heating system for ultimate operator comfort and flexibility.

DIMENSIONS


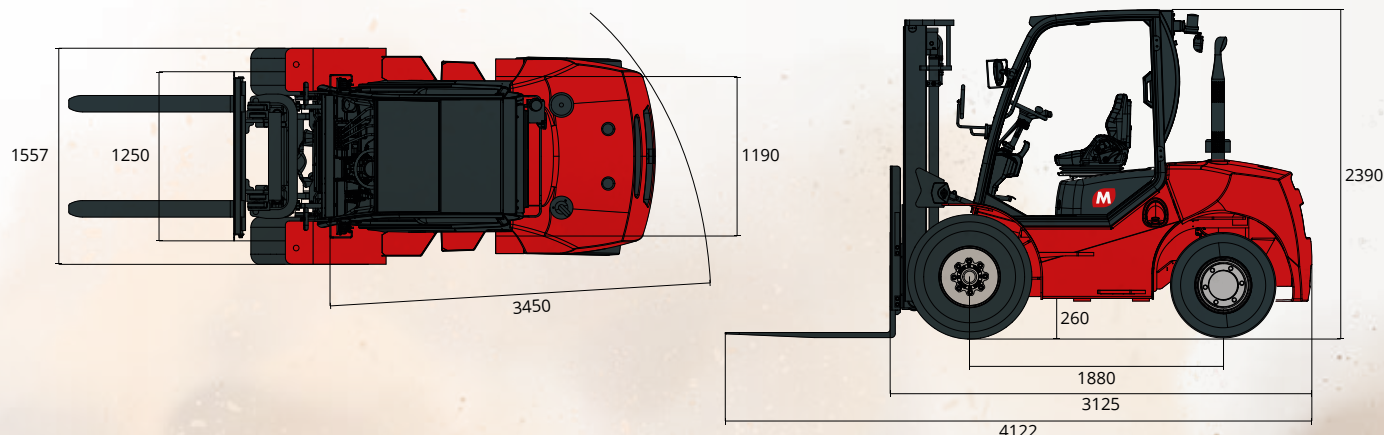


EXCEPTIONAL
OFF-ROAD TRACTION

EXCELLENT
MANEUVERABILITY

ROBUST
AND DURABLE MATERIALS

GREAT
LOAD CAPACITY
& LIFTING HEIGHT



MASTS

Type		Wide View			Triplex				
Model		M-FL-1001	M-FL-1002	M-FL-1003	M-FL-1004	M-FL-1005	M-FL-1006	M-FL-1007	M-FL-1008
Configuration		std	opt	opt	opt	opt	opt	opt	opt
Max. lifting height (mm)		3,000	3,700	4,000	4,000	4,300	4,500	4,700	5,000
Max. height (mm)	Lowered height	2,215	2,615	2,815	2,115	2,215	2,265	2,365	2,515
	Extended height without load backrest	3,782	4,482	4,782	4,860	5,160	5,360	5,560	5,860
Free lift height (mm)	Without load backrest	140	140	140	1,255	1,355	1,405	1,505	1,655
Front overhang (mm)		585	585	585	603	603	603	603	603
Tilting angle	Front	10	10	10	10	10	10	10	6
	Rear	12	12	12	12	12	12	12	6
Load Capacity (kg) 500 mm load center	ISO 22915-2	2,500	2,500	2,500	2,500	2,400	2,200	2,000	1,900
	ISO 22915-13	2,500	2,500	2,100	2,000	1,900	1,700	1,400	1,100

With Cascade fork positioner -300Kg on load capacity.

With Cascade sideshifter and fork positioner -500Kg on load capacity

FEATURES FL 2,5A

- OHG cabin
- Road lights front and rear
- Flashing amber beacon light
- Right & left rear view mirrors
- 4 valve and piping
- D shape tie-down rings
- Suspended seat
- Seat belt interlock system predisposition (OPS needed if required)
- Comfort armrest
- 4-inch LCD display
- Emergency stop button inside of the cabin
- Hourmeter
- Back-up buzzer
- Manual parking brake
- Additional lockable main power switch inside of the cab

OPTIONS FL 2,5A

- Front window with wiper
- Rear window with wiper
- Closed cabin
- Heater
- Air conditioning
- Noise insulating pad
- Super elastic tyre (replace standard tyres)
- Front solid tyres
- Non-marking tyres
- 2 front working lights
- European standard 7-core waterproof socket
- Sparkle arrestor
- Blue signal light
- Panoramic spherical mirror
- Additional lockable main power switch inside of the cab
- Operator presence system (OPT) with alarm - CE 2023
- Operator presence system with engine inhibition - mandatory for Australia
- Customized painting
- CCV system heater
- Road homologation kit - vehicle registration included
- Road use predisposition Italy - mandatory for road circulation
- Fleet management - CAN-bus plug predisposition

FULL RANGE



FL 2,5A



FL 3,0A



FL 3,5A



FL 5,0A