

TH 6.20 P



CONSTRUCTION



LOGISTICS



MINING &
QUARRYING



OIL





TH
6.20 P



CAB

Best-in-class
safety and visibility



PERFORMANCE


Unrivalled lifting
performance




LOAD LIVE DIAGRAM

Two real-time dynamic
load charts


DIMENSIONS (mm)

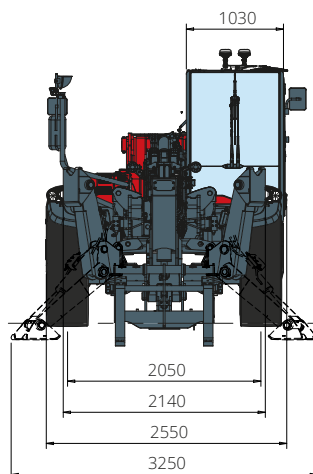

FRONT
view

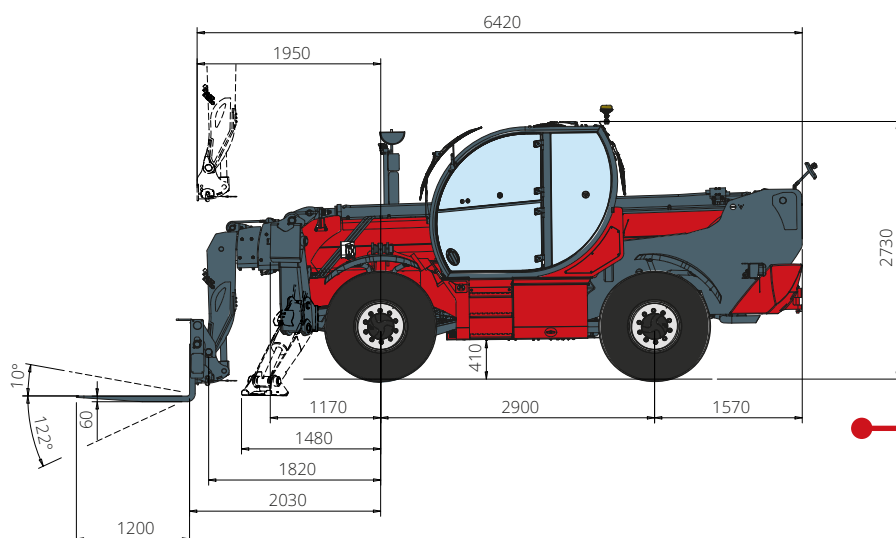


SIDE
view

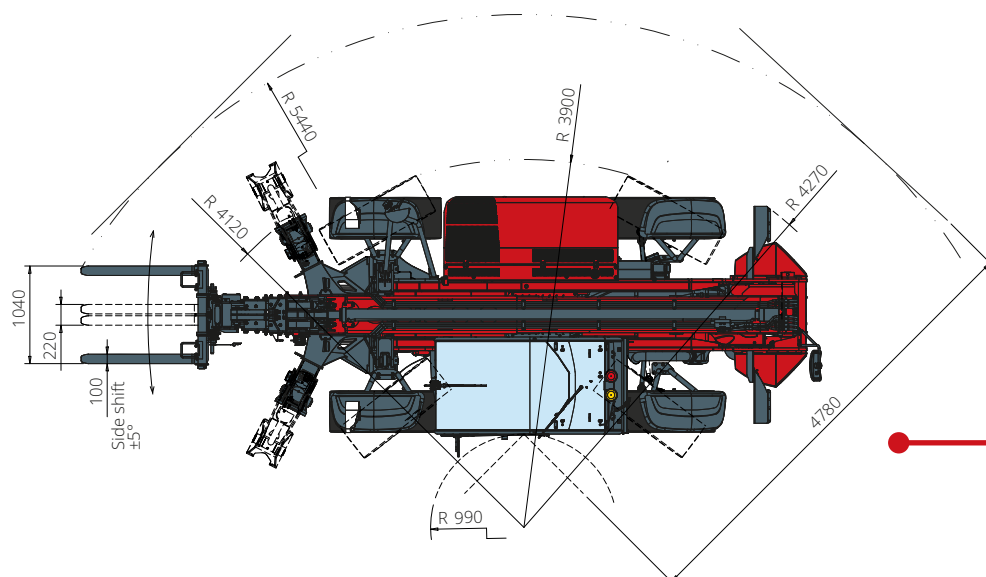


TOP
view


Load chart with
FULLY EXTENDED STABILISERS
ATT-03-004

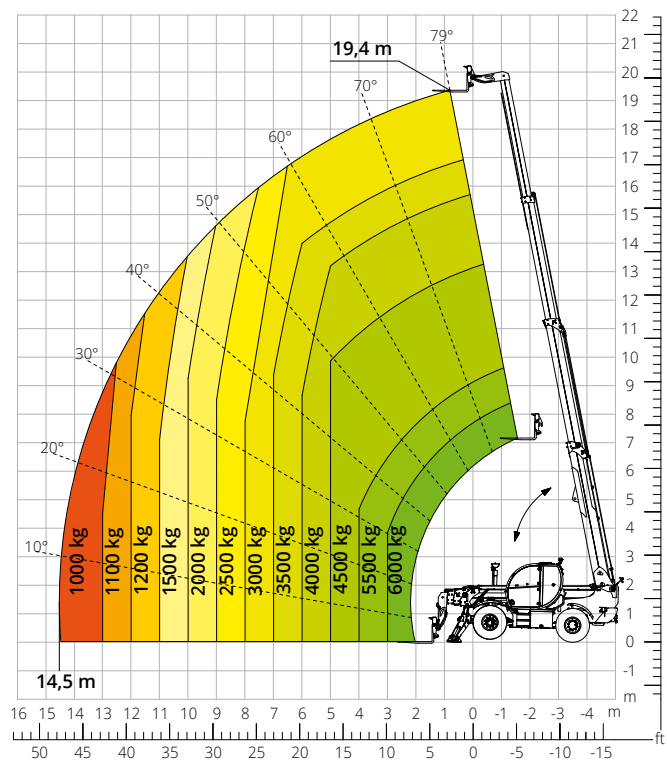


Load chart
FRONT ATTACHMENT ON TYRES
ATT-03-004

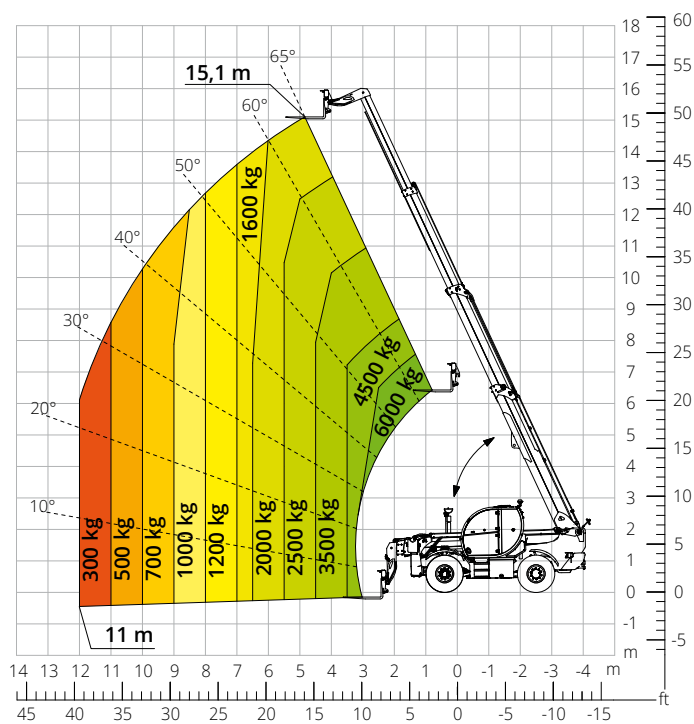

Load chart with
WINCH, 6,000 kg
ATT-02-004

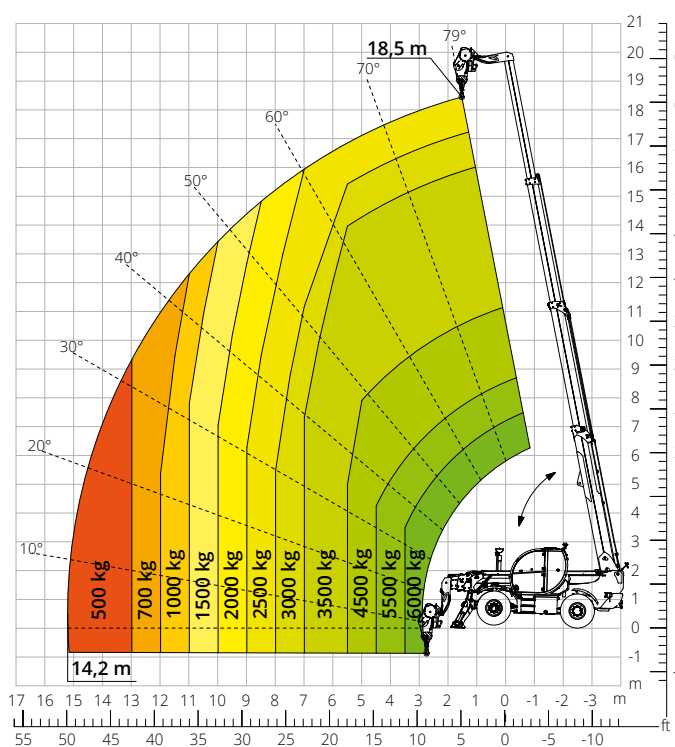


Load chart with
HOOK, 6,000 kg
ATT-05-001

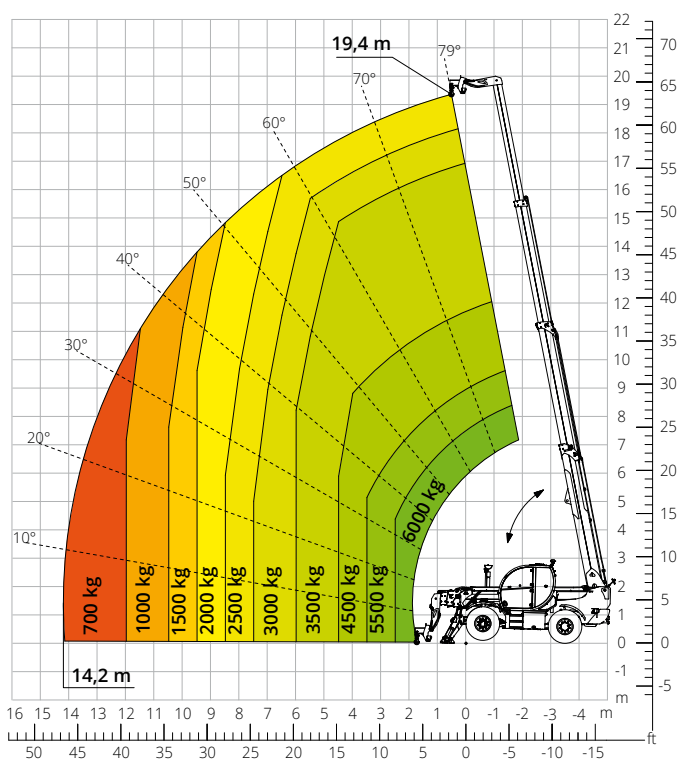


Load chart with
TYRE HANDLER, 3,800 kg

ATT-06-005

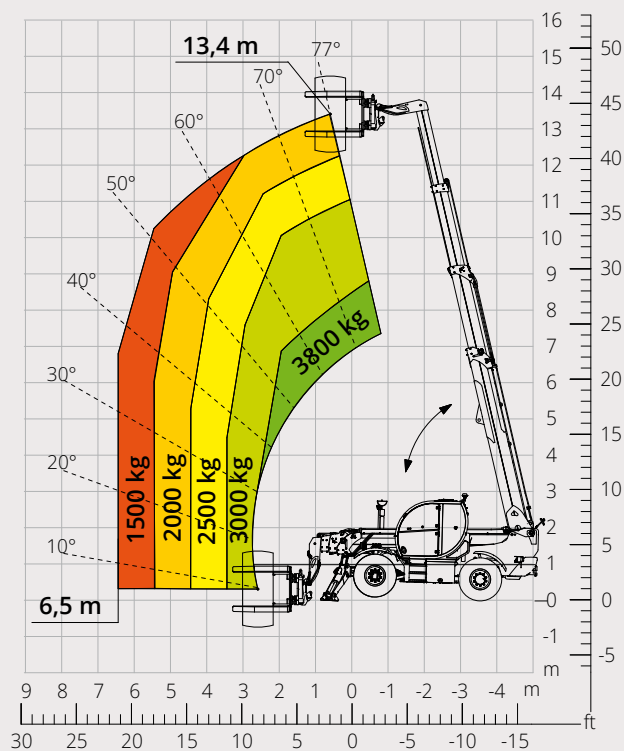


Load chart with
ROTATING EXTENDABLE PLATFORM, 500 kg

ATT-01-007

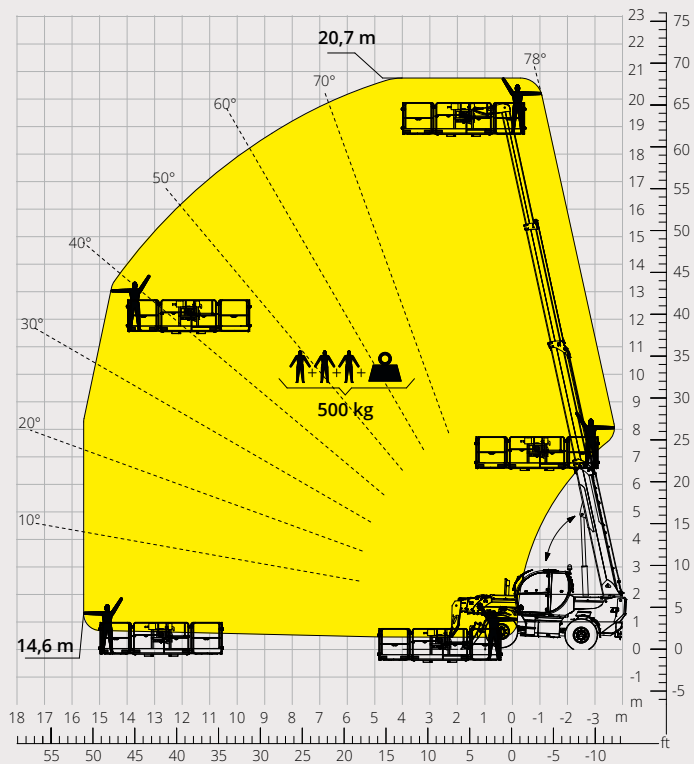


Load chart with
ROTATING EXTENDABLE PLATFORM, 1,000 kg

ATT-01-016

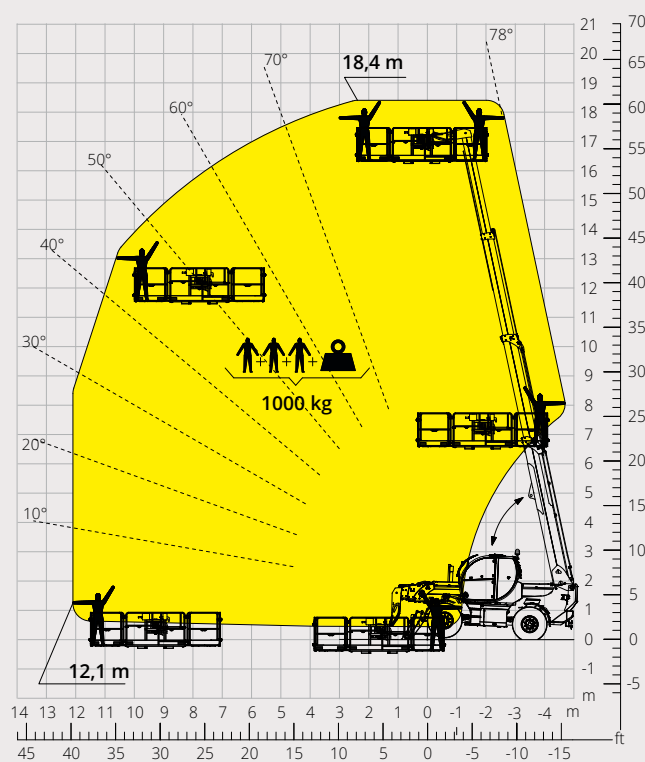


Load chart with
FIXED PLATFORM, 250 kg

ATT-01-001

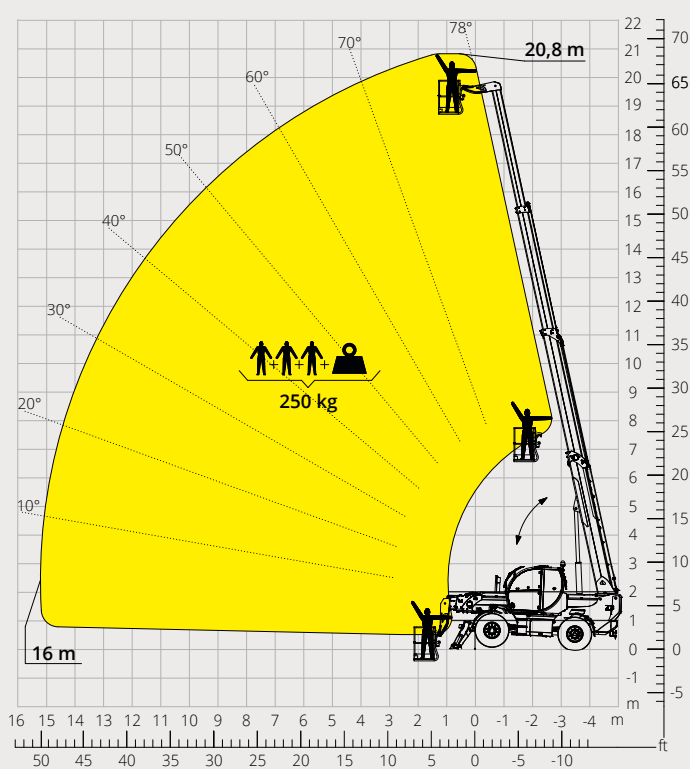

Load chart with
**PLATFORM, 450 kg,
 FOR MINES**

ATT-01-027

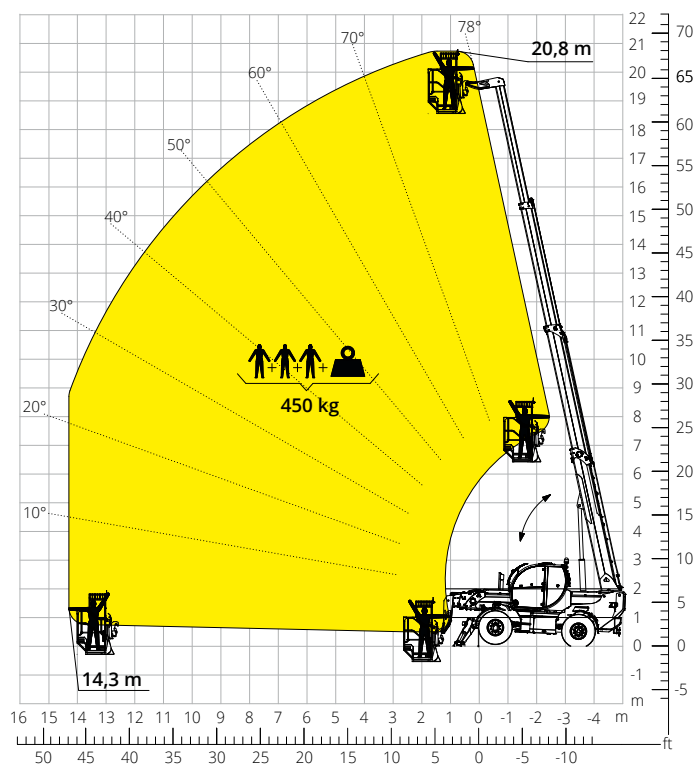

LATERAL SHIFTING SYSTEM

This telehandler is equipped with a lateral shifting system that permits to move sideways the rear part of the chassis and, with it, the telescopic boom relative to the longitudinal axis of the machine to correct the load position without the need to move the machine.

This system, in fact, allow a shifting of $\pm 5^\circ$ that corresponds to a shift of $\pm 1,5$ m with the boom completely extended, independently from which attachment is equipped.



Machine model	Telescopic handler		TH 6.20 P
	Maximum lifting capacity		6,000 kg
	Maximum lifting height		19.40 m
	Maximum reach		14.50 m
Stabilisers	TypePivoting		
Engine	Model	Deutz TCD 3,6 L4 Stage IIIA	Deutz TCD 3,6 L4 Stage V
	Rated power	100 kW (136 hp) at 2,200 rpm	
	Maximum torque	500 Nm at 1,600 rpm	
	Displacement	3.6 l	
	Cylinders	4 in line	
	Engine configuration	Turbocharged direct injection diesel	
	Cooling system	Water – intercooler	
Transmission	Type	Hydrostatic	
	Maximum pressure	500 bar	
	Gear box	Dropbox, 2 speeds forward-reverse	
Axles and brakes	Type	Axles with planetary gearboxes	
	Front axle	Oscillating and steering with levelling, +/-8°	
	Rear axle	Oscillating and steering with hydraulic lock	
	No. of driving/steering wheels	4WD - 4WS	
	Steering mode	Frontal/Concentric/Crab	
	Service brake	Wet multi-disk on front and rear axle	
	Parking brake	Hydraulic with negative action on front axle	
	Tyres dimensions	445/65 R22.5	
Performance	Max. travel speed	40 km/h	
	Gradeability (unladen)	47%	
	Turning radius (end of forks)	5,440 mm	
Weights	Total unladen*14,200 kg		
Tank and system capacities	Diesel fuel	150 l	
	AdBlue	10 l	
	Hydraulic fluid	93 l	
	Engine oil	9 l	
	Coolant	20 l	
Hydraulic circuit for movements	Circuit type	Load sensing	
	Service pump	Variable displacement	
	Max. hydraulic flow rate	105 l/min	
	Max. boom head flow rate	75 l/min	
	Max. operating system pressure	350 bar	
	Controls for boom movements	SIL 2 electro-proportional valve	
	Movements control	1 joystick with integrated manoeuvre enable	
Standard met	2006/42/EC: EU Machinery Directive		
	2016/1628: EU Regulation on the emissions of stage V engines		
	EN 1459-X: Relating to standards on the safety requirements for variable reach machines		
	EN 280-1/EN 280-2: standards relating to mobile elevating work platforms (if available)		
	ROPS/level 2 FOPS: relating to the standards for protective structures		

The data given in this brochure are provided for information purposes and are subject to change without prior notice.

All images are purely guideline and might not give an exact representation of the product.

**the stated weight refers to the vehicle unladen with standard equipment and may vary depending on the chosen configuration.*

The standard machine configuration includes:

CAB

- Comfort seat with adjustable headrest
- Adjustable steering column
- Analogue joypad
- Adjustable sunblind
- Heating
- Air conditioning
- FM/AM radio with USB and Bluetooth connectivity
- Ambient LED lights
- USB Type-A and Type-C (5 V) inputs

REAL TIME INFORMATION

- Touchscreen, 7"
- MCTS – Magni Combi Touch System on-board software
- Automatic RFID tools recognition system
- LMI – Load Moment Indicator
- LLD – Live Load Diagram
- Onboard and remote integrated diagnostics

TECHNICAL SPECIFICATIONS

- Q-Fit standard
- Provision for platform
- Advanced three-line CAN BUS system
- Automatic levelling system for outriggers
- Automatic front and rear wheel alignment
- Chassis sideshift system
- Automatic parking brake
- Mechanical battery cut-off in engine compartment
- Electrical system: 24 V – IP67

SERVICE

- Warranty: 24 months/2,000 hours