



ES08070F

Paved surface scissor lift

LIST OF STANDARD EQUIPMENT

- Proportional controls
- Self-locking door on the platform
- One way platform extension deck
- Non-marking tyres
- Two-wheel drive
- Two-wheel Steering
- Automatic braking system
- Emergency lowering
- Onboard diagnostics system
- Motion Alarm
- Tilt indicator with alarm
- Horn
- Hour counter
- Charging protection system
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Automatic pothole protection system
- Charging indicator
- Emergency brake release
- Anchoring eyebolts
- Tie-down and lifting points
- Self-weight lowering system
- Emergency pump



LOGISTICS



FOOD




CHEMICAL

ES0807OF




Load capacity		230 kg
Load capacity when extended		113 kg
Max no. Occupants (Indoor/outdoor)		2/1
Working height	A	7.80 m
Platform floor level height	B	5.80 m
Overall length	C	1.86 m
Overall width	D	0.76 m
Overall height (rails up)	E	2.15 m
Transport height (rails down)	F	1.83 m
Platform dimensions (length/width)		1.67 m x 0.74 m
Platform extension	G	0.90 m
Ground clearance (stowed)		0.60 cm
Ground clearance (raised)		0.15 cm
Wheelbase	H	1.36 m
Turning radius (inside)		-
Turning radius (outside)		1.36 m
Driving motors		2 x 24V / 0.5 kW
Lifting motors		24V / 1.4 kW
Travel speed (stowed)		4.50 km/h
Travel speed (raised)		0.50 km/h
Batteries		4 x 6 V / 185 Ah
Integrated battery charger		24 V / 30 A
Gradeability		25%
Maximum working slope		X -1.5° / Y -3°
Non-marking tyres		323 x 100 mm
Weight (CE)		1,650 kg



Non-marking solid tyres

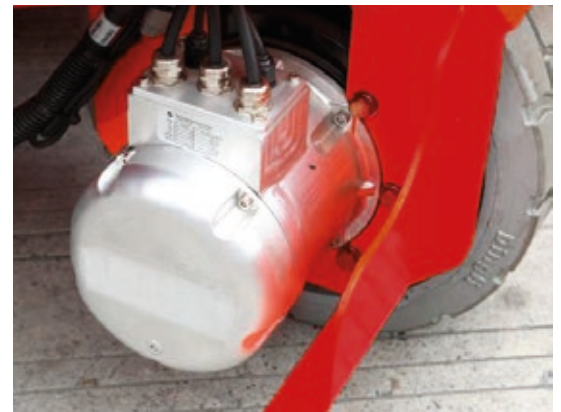

Driving motor protection

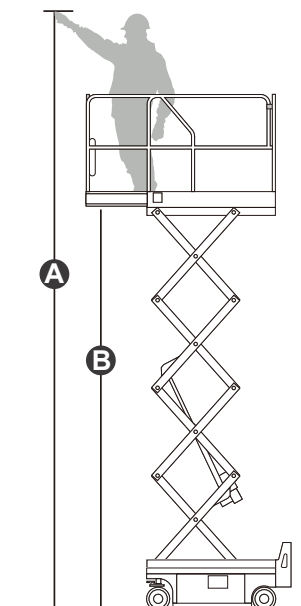

STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.