

**OUT**

ES2223RTP

Rough terrain scissor lift**LIST OF STANDARD EQUIPMENT**

- Automatic stabilizers to work at height
- Crushing protection
- Self-locking door on the platform
- Speed limit at maximum height
- Platform load sense system
- Automatic braking system
- Non-marking tyres
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Horn
- Emergency stop button
- Emergency lowering
- Anchoring eyebolts
- Onboard diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Power to platform
- Explosion-proof tubing system
- Motion Alarm
- Charging protection system
- Tie-down and lifting points
- Automatic one way platform extension deck
- Four-wheel drive
- Four-wheel steering
- Self-weight lowering system
- Emergency pump

**LOGISTICS****CONSTRUCTION**

ES2223RTP




Load capacity		750 kg
Load capacity on extended platform		750 kg
Max no. occupants		4
Working height	A	22 m
Platform floor height	B	20 m
Overall length (with outriggers)	C	4.95 m
Overall width	D	2.46 m
Overall height (rails up)	E	3.86 m
Transport height (rails down)	F	3.00 m
Platform size (length/width)		4.95 m x 2.25 m
Platform extension size	G	2.7 m
Ground clearance		40 cm
Wheelbase	H	3.3 m
Turning radius (inside/outside)		1.25 m / 3.4 m
Engine		-
Drive motor		4x32VAC/3.3kW
Lifting motor		2x48VDC/10.0kW
Travel speed (stowed)		5 km/h
Travel speed (raised)		0.4 km/h
Gradeability		30%
Maximum working slope		2°/3°
Batteries		48 V / 630 Ah
Integrated charger		-
Hydraulic tank		150 l
Diesel tank		-
Tyres		36x14-20
Weight (with outriggers)		13,400 kg



Automatic stabilizers



Airride rt tyres

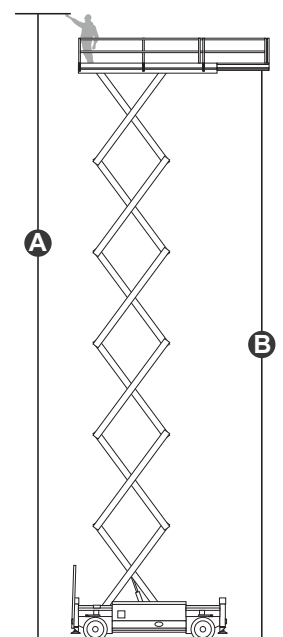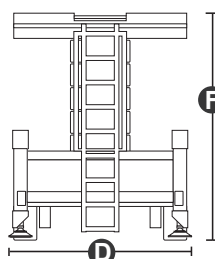

STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.