

**IN
OUT**

MHS1523RT

Rough terrain scissor lift**STANDARD EQUIPMENT**

- Automatic stabilizers to work at height
- Self-locking door on platform
- Automatic braking system
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Horn
- Emergency stop button
- Anchoring eyebolts
- On-board diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Explosion-proof tubing system
- Motion alarm
- Tie-down and lifting points
- Dual slide-out platform extension deck
- Four-wheel drive
- Two-wheel steering
- Self-weight lowering system
- manual emergency brake release
- Emergency pump
- Standard oscillating axle
- Hydraulic oil cooling system
- Anti-restart engine protection
- Platform load moment indicator
- Drivable at full height


**LOGISTICS****CONSTRUCTION**

MHS1523RT

Load capacity		680 kg
Load capacity on extended platform		227 kg
Max. occupants (inside/outside)		7/7
Max. working height	A	15.00 m
Platform floor level height (inside)	B	13.00 m
Overall length	C	4.88 m
Overall width	D	2.33 m
Overall height (rails up)	E	3.02 m
Transport height (rails down)	F	2.26 m
Platform dimensions (length/width)		4.88 m/1.83 m
Platform extension	G H	1.43 m/1.13 m
Ground clearance		0.30 m
Wheelbase	I	2.86 m
Turning radius (inside)		2.70 m
Turning radius (outside)		5.50 m
Engine	Kubota D1105 - 18.2 kW 3,000 rpm	
Range Extender engine	-	
Driving motors	-	
Lifting motors	-	
Travel speed (stowed)	5.0 km/h	
Travel speed (raised)	1.0 km/h	
Batteries	Lithium batteries 80VDC/65,5Ah	
Diesel tank	80 l	
Hydraulic tank	120 l	
Integrated battery charger	-	
Gradeability	40%	
maximum working slope	2°/3°	
Tyres	315/55/D20	
Weight (CE)	8,000 kg	



Automatic stabilizers

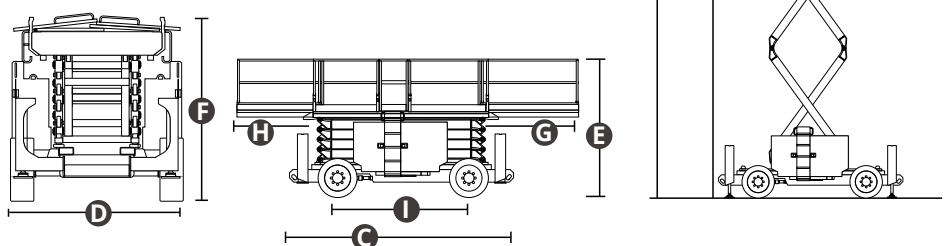

STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.