IN

MJP06

Vertical mast lift

STANDARD EQUIPMENT

- Crushing protection
- High ground clearance
- Self-locking door on platform
- Horn
- Emergency stop button
- Emergency lowering system
- On-board diagnostics system
- Hour counter
- Proportional controls
- Integrated holes for fork transport
- Charge level gauge
- Tie-down and lifting points
- Unidirectional platform extension
- Two-wheel drive
- Two-wheel steering
- Manual brake release
- Automatic braking system
- Tilt indicator with alarm
- Movement alarm sensor
- Charger protection
- Platform load moment indicator
- Drive enable system
- Flashing LED light
- Drivable at full height



LOGISTICS | CONSTRUCTION

MJP06		
Load capacity		227 kg
Load capacity on extended platform		-
Max. occupants		1/0
Max. working height	A	5.66 m
Max platform height	B	3.66 m
Overall length	C	1.36 m
Overall width	D	0.76 m
Overall heigth	E	1.67 m
Platform dimensions (length/width)		1.28 m/0.68 m
Platform extension		-
Ground clearance (stowed)		0.07 m
Ground clearance (raised)		0.02 m
Wheelbase	F	1.04 m
Turning radius (inside)		0 m
Turning radius (outside)		-
Driving motors		2x15VAC/0,5kw
Lifting motors		24VDC/2.2kW
Travel speed (stowed)		4.8 km/h
Travel speed (rated)		0.8 km/h
Up\Down Speed		17 sec/21 sec
Batteries		24VDC/224 Ah
Integrated battery charger		24 VDC/30 A
Gradeability		25%
Maximum working slope (indoor use)		3.4°
Tyres		323×100 mm
Weight (CE)		800 kg



Non-marking solid tyres

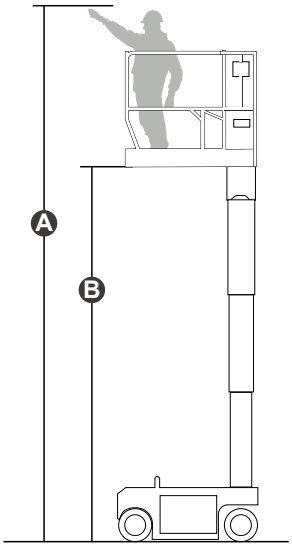





STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice.
All images are purely guideline and might not give an exact representation of the product.