


# RTH 8.46TC



CONSTRUCTION



LOGISTICS



EVENTS AND  
FILM



# RTH 8.46TC



## CAB

Best-in-class  
safety and visibility



## PERFORMANCE

Unrivalled lifting  
performance




## LOAD LIVE DIAGRAM


Three real-time dynamic  
load charts

# RTH 8.46TC


## DIMENSIONS (mm)

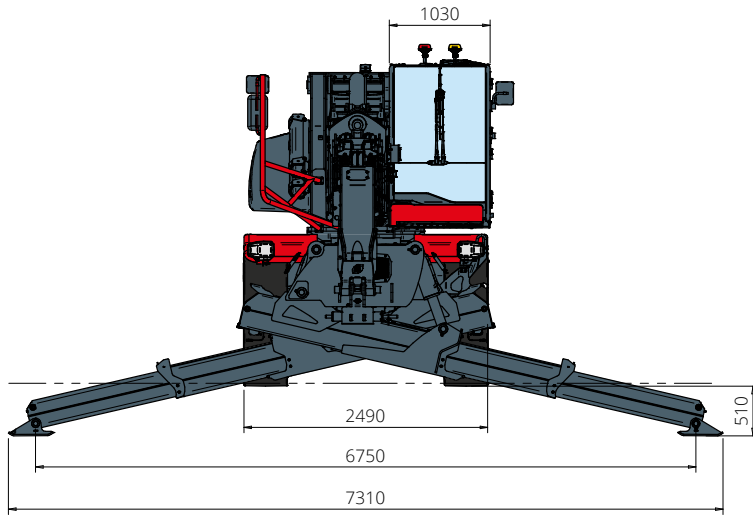

**FRONT**  
view

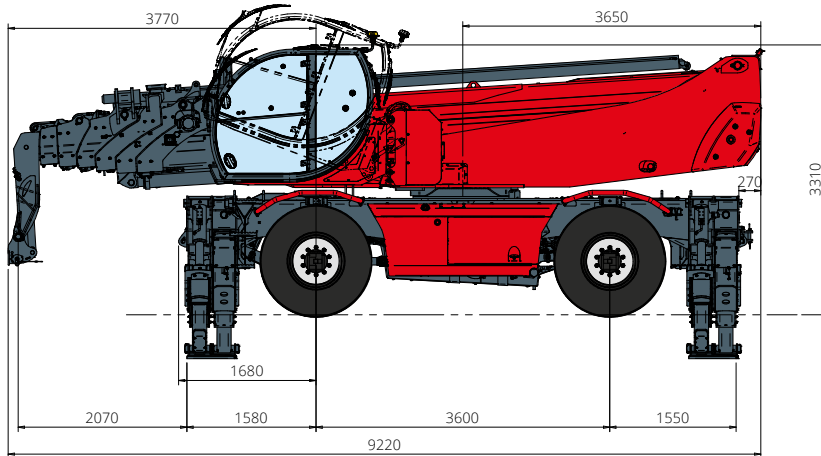


**SIDE**  
view

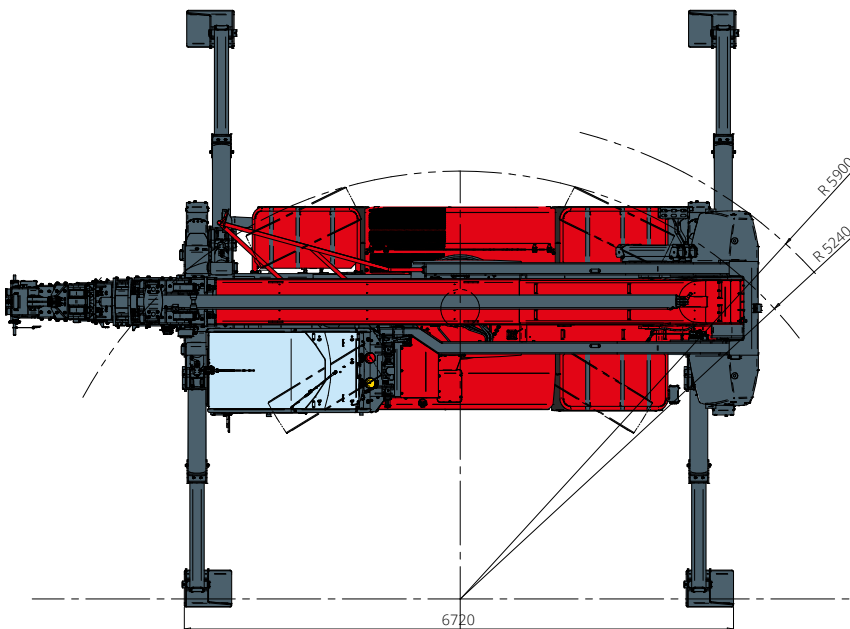


**TOP**  
view


Load chart with  
**FULLY EXTENDED STABILISERS (360°) - M1**  
 ATT - 03 - 007

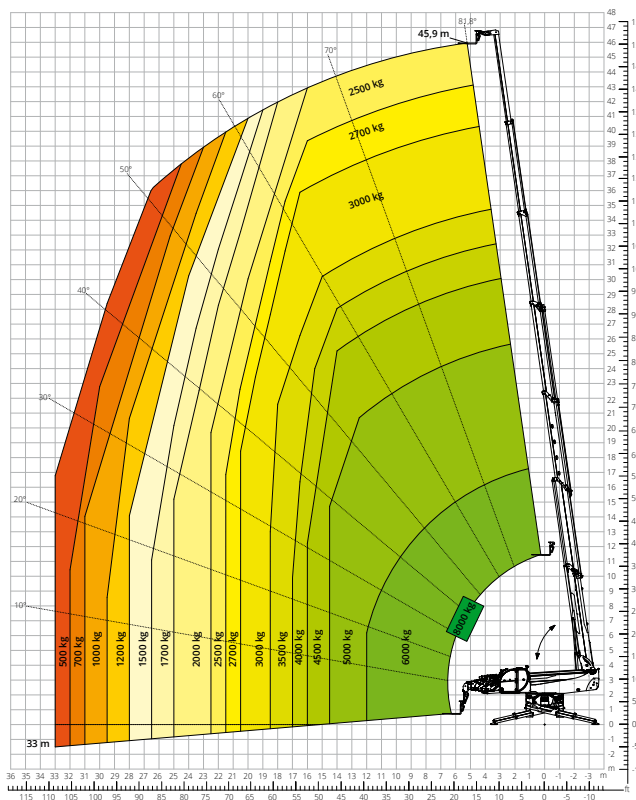


Load chart with  
**FULLY EXTENDED STABILISERS (360°) - M2**  
 ATT - 03 - 007

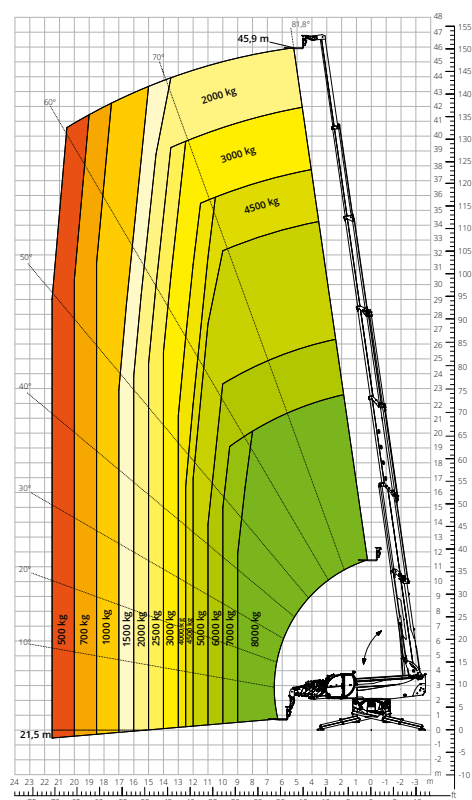


Load chart  
**FRONT ATTACHMENT ON TYRES**  
 ATT - 03 - 007

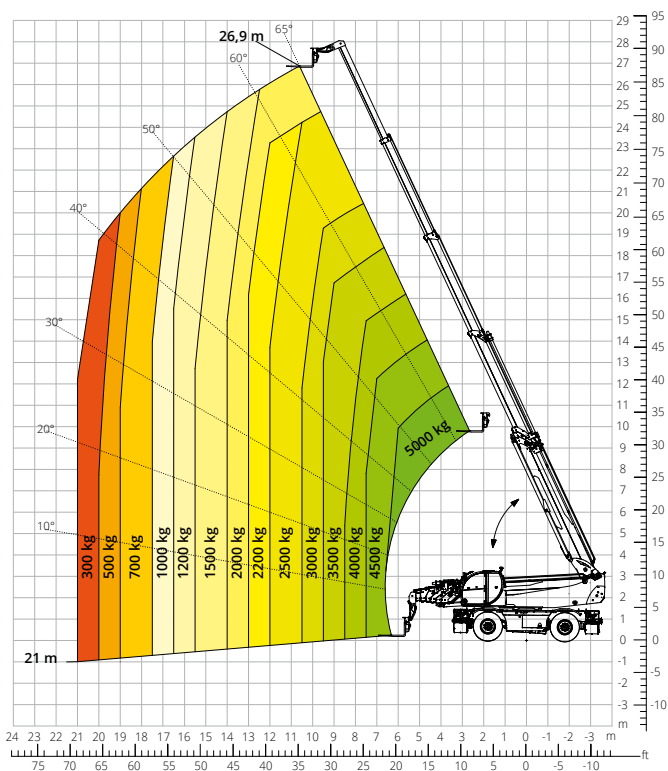


Load chart with  
**JIB WITH WINCH, 2,000 kg**  
 ATT - 04 - 015

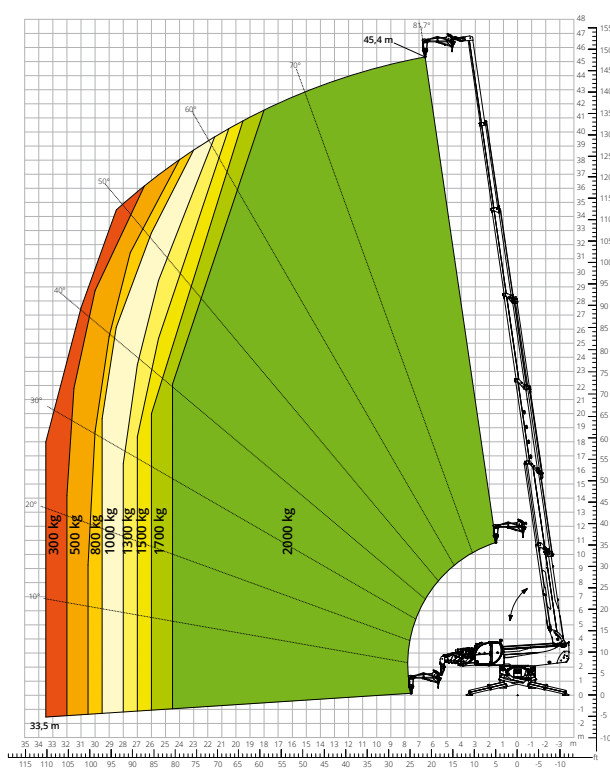


Load chart with  
**WINCH, 8,000 kg - M1**  
 ATT - 02 - 006

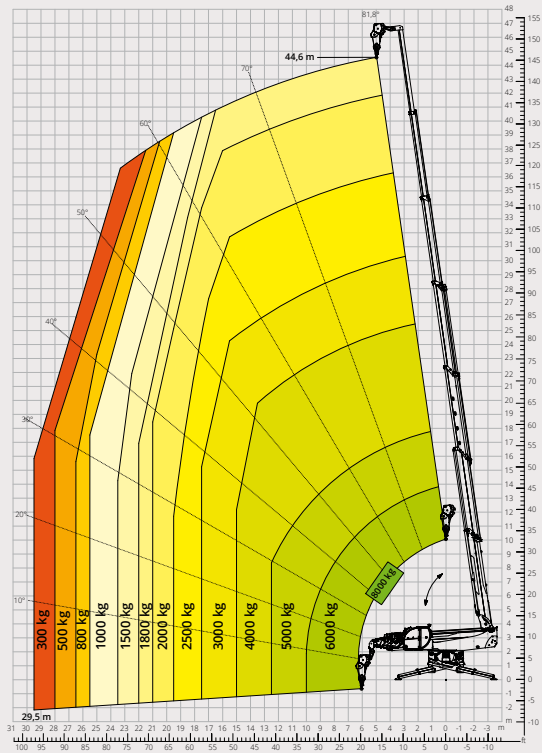


Load chart with  
**WINCH, 8,000 kg - M2**  
 ATT - 02 - 006

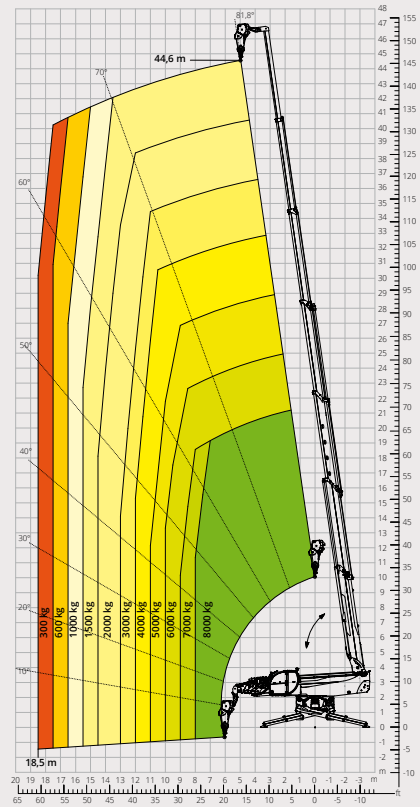


Load chart with  
**HOOK, 8,000 kg - M1**  
 ATT - 05 - 003

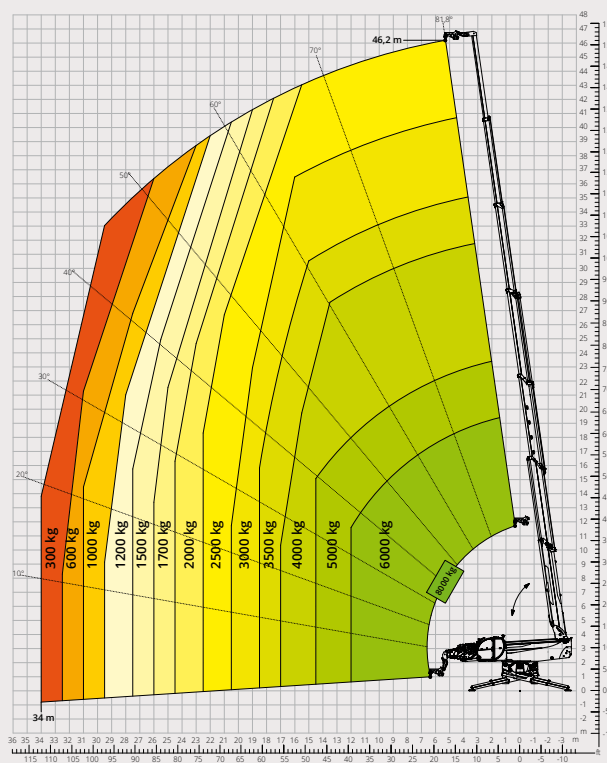


Load chart with  
**HOOK, 8,000 kg - M2**  
 ATT - 05 - 003

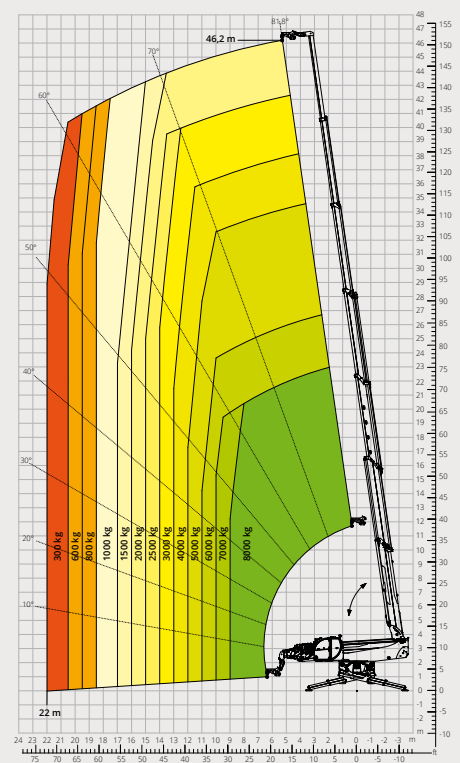


Load chart with  
**ROTATING EXTENDABLE PLATFORM,**  
**500 kg**  
ATT - 01 - 007

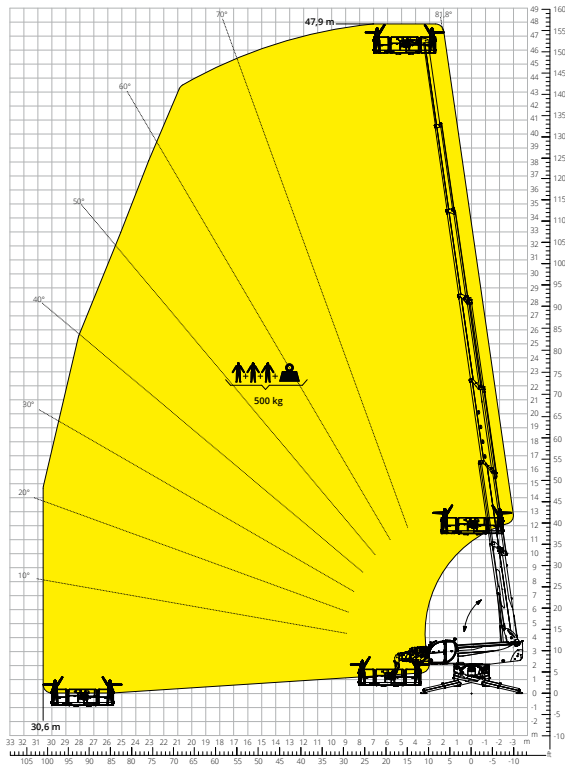


Load chart with  
**ROTATING EXTENDABLE PLATFORM,**  
**1,000 kg**  
ATT - 01 - 016

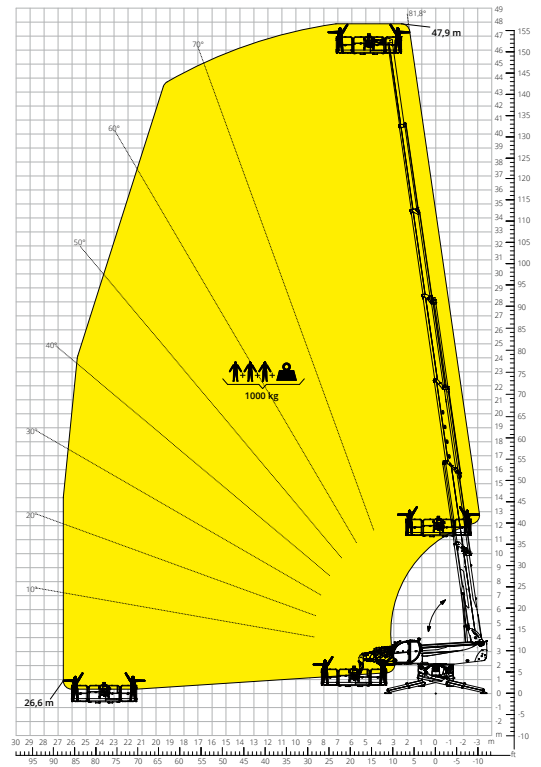

Load chart with  
**OVER-UNDER PLATFORM - POSITIVE**  
ATT - 01 - 024

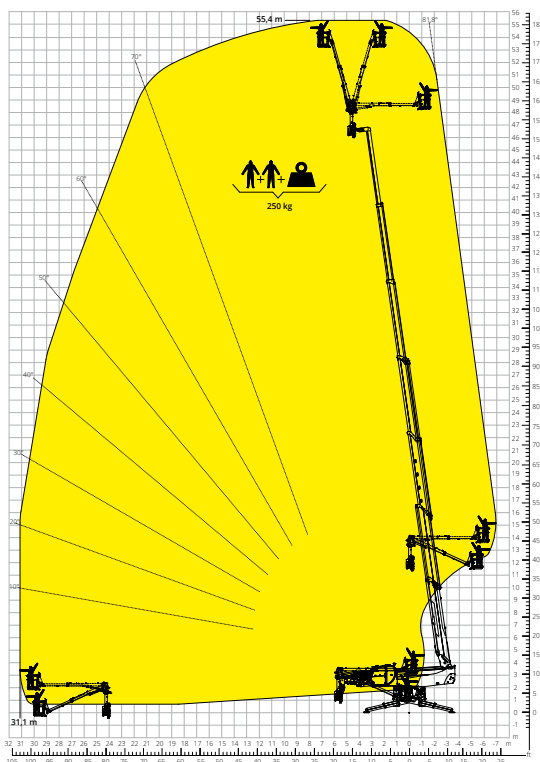

Load chart with  
**OVER-UNDER PLATFORM - NEGATIVE**  
ATT - 01 - 024

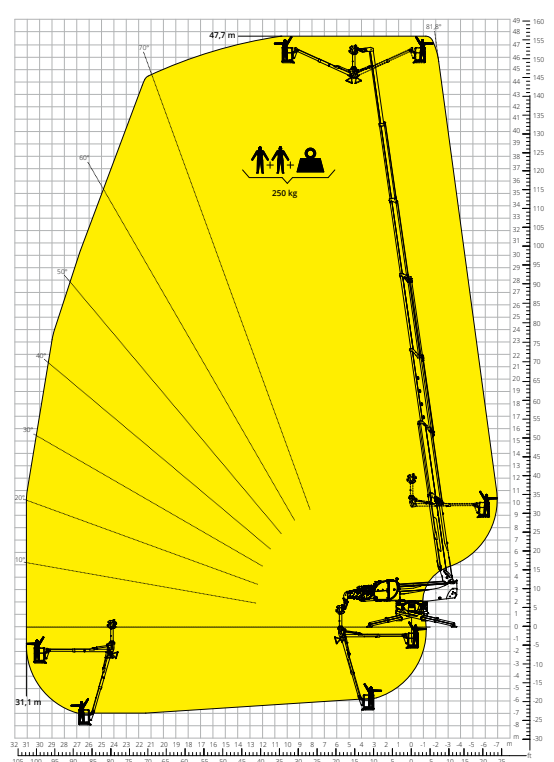

<b>Machine model</b>	Rotating telescopic handler	RTH 8.46 TC	
	Maximum lifting capacity	8,000 kg	
	Maximum lifting height	45.90 m	
	Maximum reach	33.00 m	
	Rotation	360° (continuous)	
<b>Stabilisers</b>	Type	Telescopic scissor	
<b>Engine</b>	Model	<b>Volvo TAD 552 VE Stage IIIA</b>	<b>Volvo TAD 583 VE Stage V</b>
	Rated power	160 kW (218 hp) at 2,200 rpm	175 kW (238 hp) at 2,300 rpm
	Maximum torque	910 Nm at 1,450 rpm	975 Nm at 1,380 rpm
	Displacement	5.13 l	
	Cylinders	4 in line	
	Engine type	Turbocharged direct injection diesel	
	Cooling system	Water – intercooler	
<b>Transmission</b>	Type	Hydrostatic	
	Maximum pressure	480 bar	
	Gearbox	Dropbox, 2 speeds forward-reverse	
<b>Axles and brakes</b>	Type	Axles with planetary gearboxes	
	Front axle	Oscillating and steering with levelling, +/-8°	
	Rear axle	Oscillating and steering with hydraulic lock	
	No. of driving/steering wheels	4WD - 4WS	
	Steering mode	Frontal/Concentric/Crab	
	Service brake	Wet multi-disk on front and rear axle	
	Parking brake	Hydraulic with negative action on front axle	
<b>Performance</b>	Tyre sizes	17.5 R25	
	Max. travel speed**	25 km/h	
	Gradeability (unladen)	41%	
	Turning radius (at forks)	NA	
<b>Weights</b>	Total unladen*	35,800 kg	
<b>Tank and system capacities</b>	Diesel fuel	280 l	280 l
	AdBlue	-	40 l
	Hydraulic fluid	269 l	269 l
	Engine oil	16 l	16 l
	Coolant	40 l	40 l
<b>Hydraulic circuit for movements</b>	Circuit type	Load sensing	
	Service pump	Variable displacement	
	Max. hydraulic flow rate	205 l/min	
	Max. boom head flow rate	75 l/min	
	Max. working pressure	350 bar	
	Distributor for boom and turret movements	SIL 2 electro-proportional valve	
<b>Standards met</b>	Movements control	Dual joystick with integrated manoeuvre enable	
	2006/42/EC: EU Machinery Directive		
	2016/1628: EU Regulation on the emissions of stage V engines		
	EN 1459-X: Relating to standards on the safety requirements for variable reach machines		
	EN 280-1/EN 280-2: standards relating to mobile elevating work platforms (if available)		
ROPS/level 2 FOPS: relating to the standards for protective structures			

The data given in this brochure are provided for information purposes and are subject to change without prior notice.  
All images are purely guideline and might not give an exact representation of the product.

\*the stated weight refers to the vehicle unladen with standard equipment and may vary depending on the chosen configuration.  
\*\*Maximum speed may be limited depending on the country of destination.

## The standard machine configuration includes:

### CAB

- Tilting cab up to 21°
- Premium tilting seat with air suspension and headrest
- Adjustable steering column
- Analogue joystick
- Adjustable sunblind
- Heating
- Air conditioning
- FM/AM radio with USB and Bluetooth connectivity
- Ambient LED lights
- USB Type-A and Type-C (5 V) inputs

### REAL TIME INFORMATION

- Touchscreen, 12"
- MCTS – Magni Combi Touch System on-board software
- Automatic RFID tools recognition system
- LMI – Load Moment Indicator
- LLD – Live Load Diagram
- Onboard and remote integrated diagnostics
- Reversing camera with image integrated in the MCTS

### TECHNICAL SPECIFICATIONS

- Q-Fit standard
- Provision for platform
- Advanced three-line CAN BUS system
- Automatic levelling system for outriggers
- Automatic front and rear wheel alignment
- High-precision turret rotation motor by Liebherr
- Automatic parking brake
- Mechanical battery cut-off in engine compartment
- Electrical system: 24 V – IP67

### SERVICE

- MyMagni by Trackunit connectivity system (Free of charge on request)
- Warranty: 24 months/2,000 hours