IN
OUT

DS2223RTP

Rough terrain scissor lift

STANDARD EQUIPMENT

- Automatic stabilizers to work at height
- Crushing protection
- Self-locking door on platform
- Speed limit at full height
- Platform load sense system
- Automatic braking system
- Non-marking tyres
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Horn
- Emergency stop button
- Emergency lowering system
- Anchoring eyebolts
- On-board diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Platform power socket
- Motion alarm
- Integrated holes for fork transport
- Tie-down and lifting points
- Dual slide-out platform extension deck
- Four-wheel drive
- Four-wheel steering
- Self-weight lowering system
- Manual emergency brake release
- Hydraulic oil cooling system
- Anti-restart engine protection
- Drivable at full height



LOGISTICS | CONSTRUCTION


DS2223RTP		
Load capacity		750 kg
Load capacity on extended platform		750 kg
Max. occupants (inside/outside)		4/4
Max. working height	A	22.00m
Platform floor level height (inside)	B	20.00 m
Overall length	C	4.95 m
Overall width	D	2.46 m
Overall height (rails up)	E	3.86 m
Transport height (rails down)	F	3.00 m
Platform dimensions (length/width)		4.59 m/2.25 m
Platform extension	G	2.70 m
Ground clearance		0.40 m
Wheelbase	H	3.30 m
Turning radius (inside)		1.25 m
Turning radius (outside)		3.40 m
Engine		Kubota Z482/9.8kW
Range Extender engine		-
Driving motors		-
Lifting motors		-
Travel speed (stowed)		4.7 km/h
Travel speed (raised)		0.4 km/h
Batteries		48V/630Ah
Diesel tank		100 l
Hydraulic tank		150 l
Integrated battery charger		-
Gradeability		40%
maximum working slope		36x14-20
Tyres		36×14-20
Weight (CE)		13,000 kg





Automatic stabilizers



Non-marking solid tyres

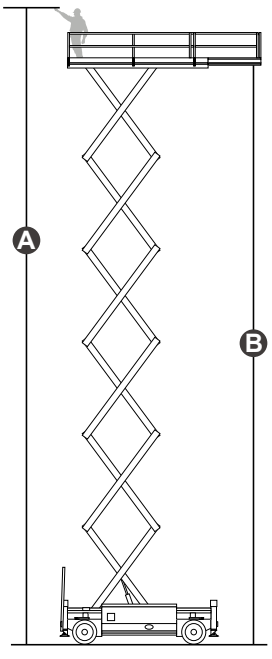





STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.